


TINY MICROPHONE

Amplified Microphone

This tiny microphone is a small amplified microphone that has adjustable volume. It is compatible with wireless A/V systems and general purpose audio applications that require a "line level" microphone. It requires 4-15VDC.

Features:

- Sensitive electret condenser microphone
- 20Hz to 10Khz frequency response
- Wide adjustable volume range
- 3-lead cable with bare leads
- Wide operating voltage, 4VDC to 15VDC @10mA
- Weighs approximately three grams, Size 1.2" x 0.5"

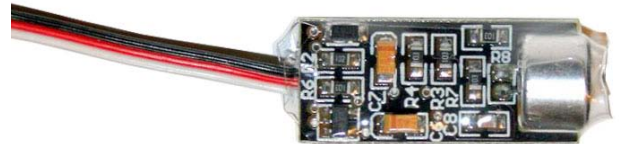

Installation:

The 3-wire cable has bare leads. They are connected as follows:

Red: DC Power, 4VDC to 15VDC

Black (or Brown): Ground

White (or Orange): Audio Out

Note: This microphone is NOT reverse polarity protected. Incorrect connections may cause damage and will void the warranty.

Volume Adjustment:

The volume control is located on the bottom of Tiny-Mic. Changing the audio level requires a small Jeweller's screwdriver. Alternately, a flat wooden toothpick can be carved to fit the screwdriver slot. It is fragile so please be careful adjusting it.

Cover the exposed volume control with plastic tape if there is any chance it may touch other metallic surfaces during use. Even if this is not expected to occur, we highly recommend protecting the exposed volume control with a piece of tape.



Disclaimer:

FirstPersonView.co.uk, or their distributors, have no control over the installation and use of their products. As such, no liability may be assumed, nor will any liability be accepted, for any damages resulting from the use of this product. Under no circumstances will the buyer be entitled to consequential or incidental damages. Use at your own risk. By act of installing it, the buyer accepts all resulting liability.